

Inspired by



Architectural and Technical LED Luminaires.




OFFICE

OFFICE



EDUCATION

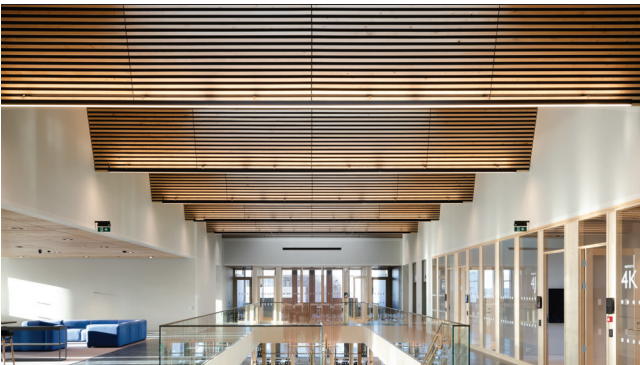

ARCHITECTURAL



HOSPITALITY



INDUSTRY / SPORT




In-house
engineering &
development




Focused on
high-quality

Using digitalization to
achieve a better user
experience

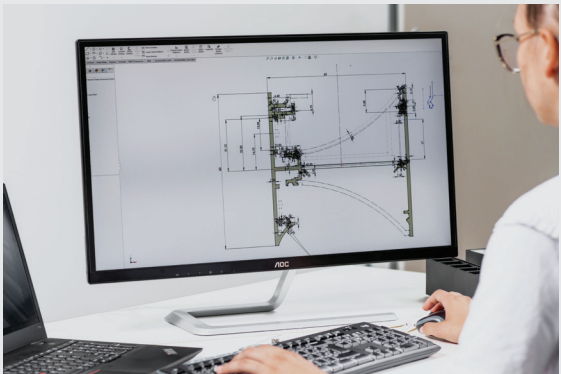

In-house
manufacturing

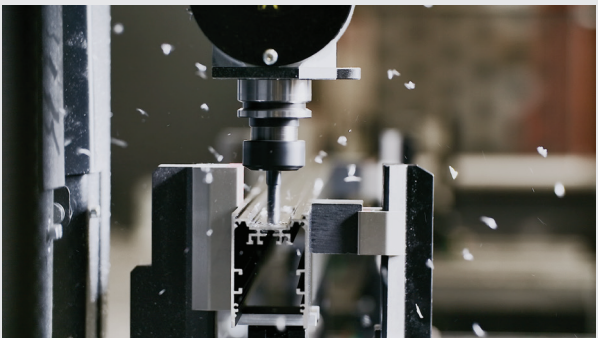

Responsiveness and customers
oriented approach





BY OLEG COSNEANU

DRY SOLE

Slim round pendant luminaire

Dry Sole, a new addition to complement the DRY family, is a pendant luminaire crafted from a slim aluminium profile and featuring a slender round design. Available in various diameters, like 600, 900, 1200, and 1700 mm. Easily adaptable to office, architectural, or retail settings, it contributes to creating an ambient atmosphere and captivating scene.



SOE

Luminaire for a welcoming elegance

SOE, a luminaire of sublime elegance, is suspended gracefully by a sleek carbon rod. Its transparent round panel, available in two diameters (150mm and 400mm), ensures the luminaire remains both elegant and unobtrusive, with its direct and indirect light distribution. The addition of a central light spot for a more direct illumination makes a bold statement, highlighting the luminaires presence. SOE guarantees a captivating ambiance in any space as it was designed to cultivate an intimate atmosphere and evoke a pleasant sensation over brightness.



CURVE ILO

Curved connectable lighting profiles

Our bestselling ILO 50 linear profile system gets upgraded to its curved version. Meticulously designed for projects that demand advanced technical characteristics, ILO CURVE offers a captivating selection of straight and curved sections with 45°, 60°, and 90° angles. Providing you with the creative freedom to sculpt a distinctive lighting concept tailored precisely to your preferences and the requirements of your space.



LENE ART


Tubular luminaire upgraded with custom-made patterns

We have enhanced our LENE Tube luminaire by upgrading the fully illuminated body with custom-made patterns. This feature offers the chance to craft distinctive patterns that will elevate your ambient lighting. The luminaire LENE Art is offered in both ceiling and pendant versions, with the driver seamlessly integrated into the luminaire's body. With a 260-degree light distribution, it guarantees a wide and well-illuminated area.




Penrose-inspired design of lights and sound-absorbing panels

INTINUM

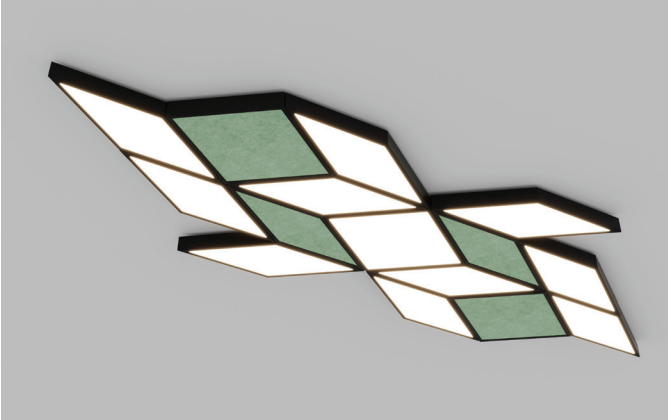


INTINUM is a modular system of lights and sound-absorbing panels whose adaptability allows infinite compositions. Two sets of pair elements – *kite* and *dart*, and *slim* and *fat rhombus* – create ever-changing patterns that never precisely replicate when following specific rules as per Penrose tiling. Yet, within the mathematical order, there is creative freedom. INTINUM enables architects and lighting designers to create anything from minimalistic geometric designs to more harmonious patterns and shapes.

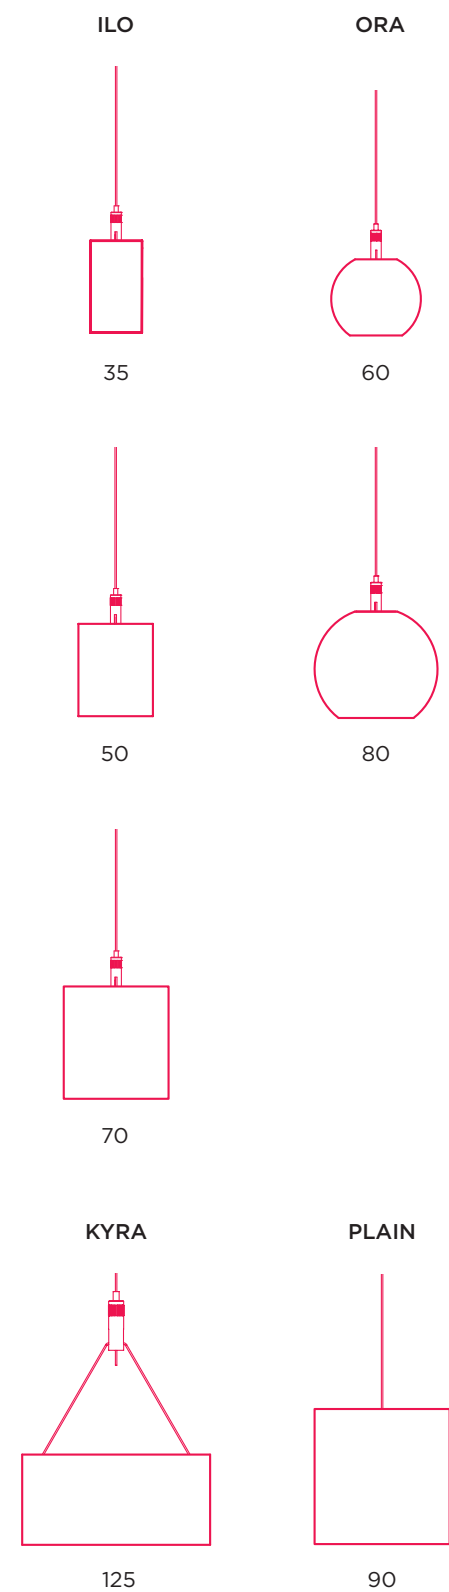

PROFILES

Single luminaires and light-line systems

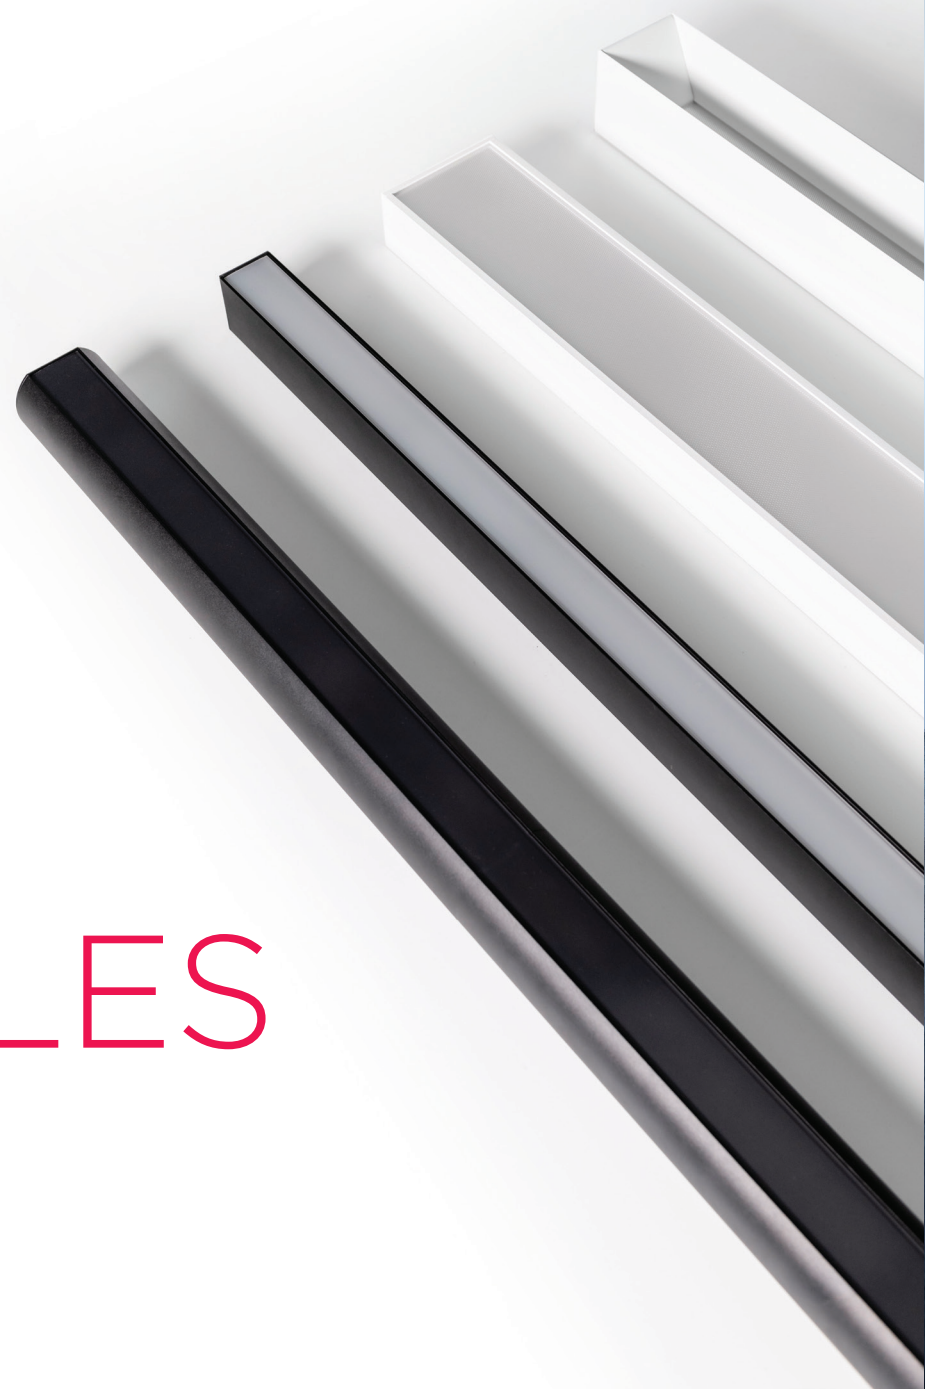

PROFILES



Curved-edge **ORA** linear lighting profile



Elegant with its oval housing, ORA is a fresh new lighting solution when projecting the interior of an office or any public building. Its high-quality housing in a powder coated finish makes it a bold and stylish luminaire, available with various optics solutions: modular narrow/wide, opal, prismatic, office or asymmetric; and up and downlight possibilities.

- LP: 1820-3740; HE: 2520-5180; HO: 3350-6900lm/m
- LP:16-30; HE: 22-42; HO: 31-59W/m
- 2700 / 3000 / 4000 / 5000K or TW 2700 to 5000K
- CRI > 80, CRI > 90, CRI > 95
- MacAdam Step 3
- L80 B20 at 100.000h, Ta=25°C ambient temperature possibilities.

ILO

Continuous light-line system.



The ILO luminaire is one of the most versatile profile solutions on the market. Designed for projects that demand a high quality lighting system and high visual comfort, it offers a vast selection of features, materials and performance features to choose from.

- LP: 1820-3740; HE: 2520-5180; HO: 3350-6900lm/m
- LP: 16-30; HE: 22-42; HO: 31-59W/m
- 2700 / 3000 / 4000 / 5000K or TW 2700 to 5000K
- CRI > 80, CRI > 90, CRI > 95
- MacAdam Step 3
- L80 B20 at 100.000h, Ta=25°C ambient temperature

35 mm

70 mm

50 mm



Designed by Kai Piippo
for Annell.

PLAIN

Elegance of simplicity,
efficiency of LED
technology.

Ideal for offices.

The elegant product from our family range is now available in different lengths, starting from 798mm and reaching up to 2898mm in single piece. Separate units can be also connected together to form longer systems. The product was additionally extended with various optic types, which can be used according to your preferences and your needs. You can choose between opal, prismatic, modular wide/narrow, office and office basic optic.



- LP: 1731-3840; HE: 2400-533;
HO: 3190-7090lm/m
- LP: 18-32; HE: 23-45; HO: 32-63W/m
- 2700 / 3000 / 4000 / 5000K or TW
2700 to 5000K
- CRI > 80, CRI > 90, CRI > 95
- MacAdam Step 3
- L80 B20 at 100.000h, Ta=25°C ambient
temperature

90 mm

Opal

Prismatic

Modular

Office

Office Basic

Now
available also
in bronze

KYRA

Low UGR.
Ideal for offices.

Popular in offices and school applications, KYRA is now available also as a system to form longer uninterrupted light-lines. Available as a recessed, ceiling or pendant mounting type.



- LP: 1900-3750; HE: 2640-5200;
HO: 3510-6920lm/m
- LP: 16-30; HE: 22-42; HO: 31-59W/m
- 2700 / 3000 / 4000 / 5000K or TW 2700 to
5000K
- CRI > 80, CRI > 90, CRI > 95
- MacAdam Step 3
- UGR<16
- L80 B20 at 100.000h, Ta=25°C ambient
temperature

125 mm

SHAPES ILO | ORA

Square, rectangular and hexagon pendant luminaires. Simple and contemporary.



Based on the design of ILO profiles, ILO Hexagon and ILO Quadro come in various sizes, optics options and up and down light. The geometrical shape adds playful feel to any architectural or office spaces. Being pre-assembled as one unit, an easy installation is guaranteed.

Hexagon shape is available also with ORA Profile.

- 2700 / 3000 / 4000 / 5000K
- CRI > 80, CRI > 90
- MacAdam Step 3
- L80 B20 at 100.000h, Ta=25°C ambient temperature



Recessed
90 / 160 / 230 /
300 mm

Recessed Trimless
216 / 286 mm



Track
146* / 216* /
286 mm



Track with hinge
146* / 216* mm



Track with rod**
146* / 216* mm

* available only with modular optic
** rod length:
100, 200, 300, 400, 500, 600, 700,
800, 900 mm

ILO MINI

Minimalistic,
yet impressive.

With its aesthetic appeal, ILO Mini offers new application opportunities for a modern and sophisticated look for any type of environments, including hospitality applications, restaurants, museums, corridors, office buildings, private buildings and other similar areas.

- 2700 / 3000 / 4000 / 5000K
- CRI > 80, CRI > 90
- MacAdam Step 3
- UGR<16
- L80 B20 at 100.000h, Ta=25°C ambient temperature

Make it
your way


Like changing the skin, Camaleo changes its form, texture, and material structure, offering perfect ambient illumination with excellent technical characteristics. Whenever you get tired of it, there is no need to change the entire luminaire in the room, but just replace the side cover. The profile comes in three different shapes. Different finishes, like textiles, wood, and other materials are available. The housing is offered in various colors, with black, white, and grey as the standard options. You can choose between opal, prismatic, nero, modular and office optic.



CAMALEO



- LP: 1820-3740; HE: 2520-5180; HO: 3350-6900lm/m
- LP: 16-30; HE: 22-42; HO: 31-59W/m
- 2700 / 3000 / 4000 / 5000K or TW 2700 to 5000K
- CRI > 80, CRI > 90, CRI > 95
- MacAdam Step 3
- L80 B20 at 100.000h, Ta=25°C ambient temperature



60



60



60

Material
examples




Wood



Velvet




Stone

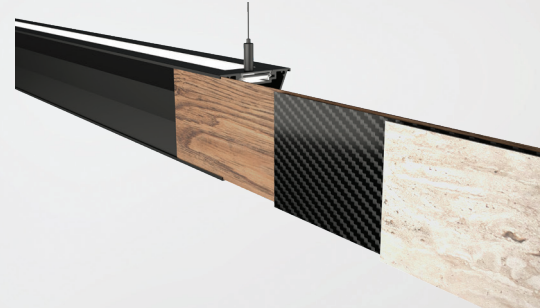

60

LENE TUBE

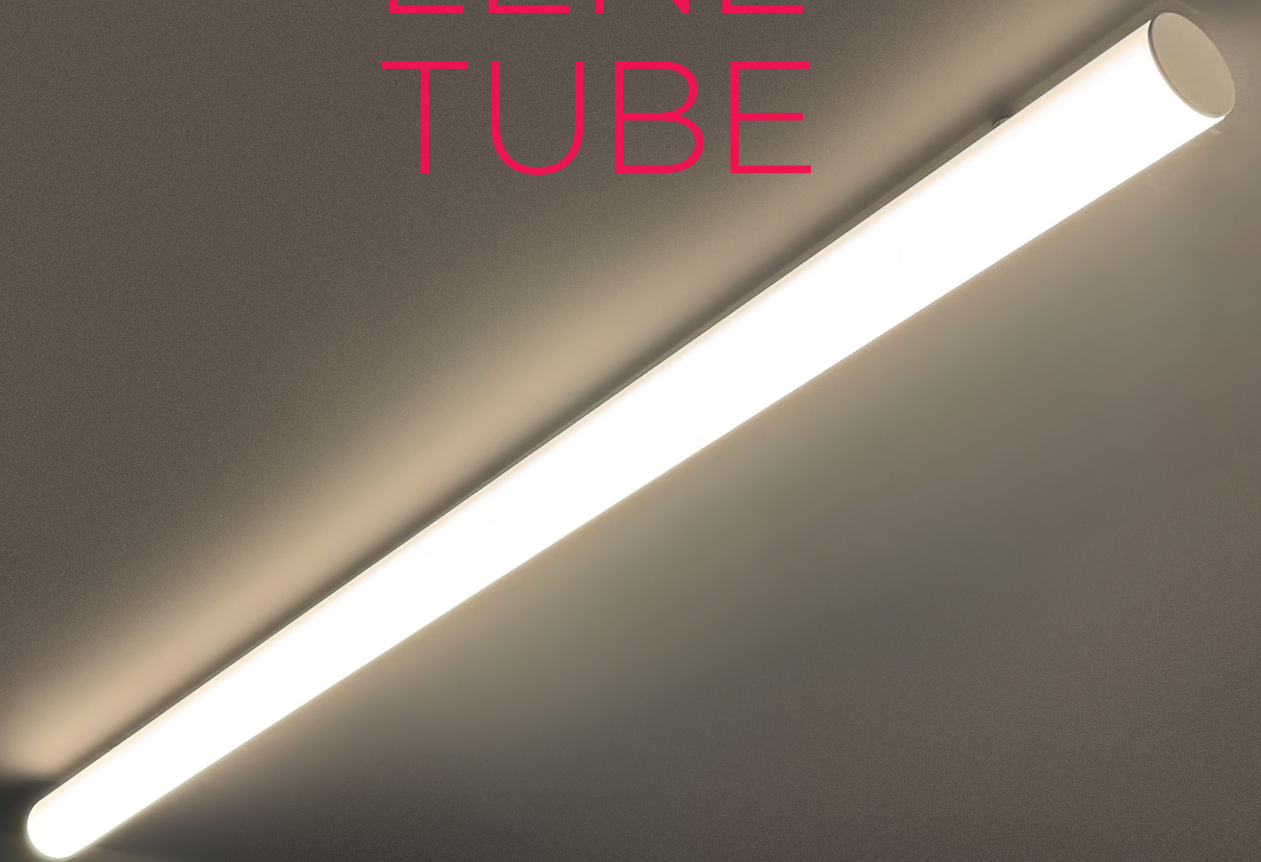

The LENE Tube creates homogeneous ambient lighting and a gentle ceiling glow with its completely illuminated opal body. An all-white version of this luminaire adds sophistication and minimalistic touch to your interiors, however by combining coloured endcaps and cables LENE Tube is transformed into a playful luminaire and a creative choice for any space. Even when not illuminated, the LENE Tube stands out with its distinctive decorative presence, thanks to its smooth milky surface.

- HE: 2950lm/m
- 22W/m
- 2700 / 3000 / 4000 / 5000K
- CRI > 80, CRI > 90, CRI > 95
- MacAdam Step 3
- L80 B20 at 100.000h, Ta=25°C ambient temperature


BY
OLEG
COSNEANU

INNOVATION
FLEXIBILITY
FREEDOM

DRY

DRY is a family of luminaires with eye-catching effect, available in many installation options, like pendant luminaire, stand-alone floor lamp or wall luminaire. The luminaire has a decorative and functional presence thanks to the variety in shape and the combination of an illuminated aluminium rod with and optional decorative panel with various covers for an additional light spot. Its versatility allows you to adapt it for various projects and to use the same product family throughout your interior, easily adopting it in every office, hospitality or residential project.

Material examples



- DRY ROD**
- 805lm/m; 8W/m
 - 3000 / 4000K
 - CRI > 90
 - MacAdam Step 3
 - L80 B20 at 50.000h, Ta=25°C ambient temperature

- DRY DECORATIVE PANEL**
- 130lm; 1,5W/spot
 - 3000 / 4000K
 - CRI > 90
 - MacAdam Step 3
 - L80 B20 at 50.000h, Ta=25°C ambient temperature

IKAR

Ring-shaped luminaire

Characterized by a ring light, IKAR is a fascinating alternative to conventionally-shaped luminaires. The fully adjustable head can be freely rotated up to 360° as well as to a ±90° direction for an optimum adaptation of light on different angles. Specially-designed optical lenses developed using innovative know-how in optical expertise deliver pleasant and directional light with low UGR and with hidden LED hot spots.

- 260-740lm
- 4-12W
- 2700 / 3000 / 4000 / 5000K
- CRI > 80, CRI > 90
- MacAdam Step 3
- L80 B20 at 100.000h, Ta=25°C ambient temperature

ø 65, 127 mm



APOLLO





With its wide area of illuminated circular surface and indirect lighting, the Apollo delivers homogeneous illumination and a pleasant atmosphere. Being available in various dimensions, it offers you several possibilities when applying the same luminaire's family within a project. The Apollo is a versatile solution for offices, lobbies, foyers, lounges, reception areas and other spacious ambiances, adding character and enhancing the room.

- LP: 1960-5170; HE: 2810-7390; HO: 3740-9830lm
- LP: 18-53; HE: 25-75; HO: 35-105W
- 2700 / 3000 / 4000 / 5000K
- CRI > 80, CRI > 90
- MacAdam Step 3
- L80 B20 at 100.000h, Ta=25°C ambient temperature



ø 450, 680 mm

Various shapes
available for single or
group installations

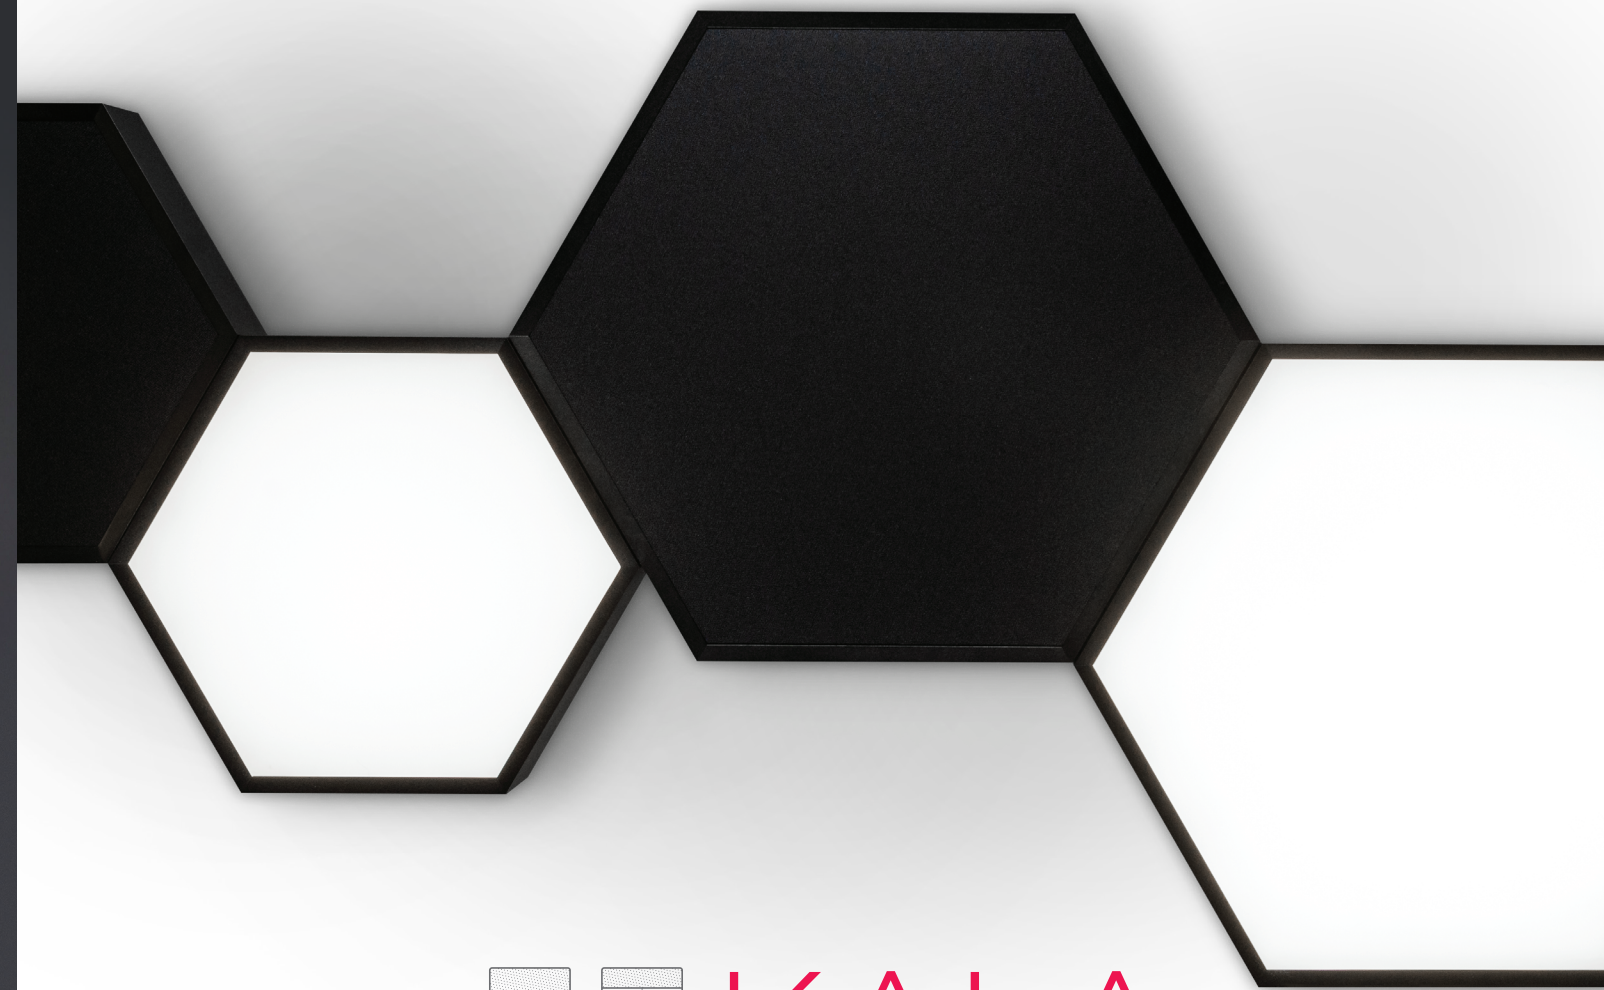

KALA SHAPES

KALA comes in different sizes and forms like rectangular, circular, hexagonal and triangle as a standard. With a 100 mm high aluminium profile and an even illuminated surface with opal diffusor, KALA SHAPE is a universal but also a bold luminaire. KALA SHAPES are suitable for single or group ceiling installations. Group installations can be enhanced by incorporating acoustic panels into the aluminium body of the luminaire which effectively improves the room acoustics by facilitating the absorption and scattering of sound waves. Available also as pendant mounted.

- HE: 1930-14.110; HO: 2570-19.750lm
- HE: 18-134; HO: 24-184W
- 2700 / 3000 / 4000 / 5000K
- CRI > 80, CRI > 90
- MacAdam Step 3
- L80 B20 at 100.000h, Ta=25°C ambient temperature



EOS CIRCULAR

From transparency
to homogeneous light.



Six different sizes from
470 to 1000 mm

Characterized with a 24mm slim aluminium ring around a completely transparent panel, EOS Circular is an elegant and unobtrusive element in the room, which apparently changes its form when switched on, losing its transparency and transforming it in a homogeneously distributed light. It results in the perception of pleasant circular light hanging in the air.

- 4050-7640lm
- 45-84W
- 2700 / 3000 / 4000 / 5000K
- CRI > 80, CRI > 90
- MacAdam Step 3
- UGR<19
- L80 B20 at 100.000h, Ta=25°C ambient temperature



EOS

Minimalism. Style.
High visual comfort.

The luminaire that makes your office a place of comfort and gives a stylish touch to your interior. Emitting light both up to the ceiling and down to the workspace, it supplies homogenous glare-free light and maximum level of visual comfort. It is the perfect fixture for conference rooms, open offices, lobbies, and other environments where you want to make an impact.

- 5030-5510lm
- 60-65W
- 2700 / 3000 / 4000 / 5000K
- CRI > 80, CRI > 90
- MacAdam Step 3
- L80 B20 at 100.000h, Ta=25°C ambient temperature



EOS SYSTEM



Pendant modular system for special applications



A perfect balance between decorative and functional lighting, a fixture that enhances the mood and modern feel of every lighting area in an office building, hotel foyer, conference room, entrance or corridor.

- 5030-5420lm
- 60-64W
- 2700 / 3000 / 4000 / 5000K
- CRI > 80, CRI > 90
- MacAdam Step 3
- L80 B20 at 100.000h, Ta=25°C ambient temperature



ARUN

Light that supports performance and well-being


The ARUN LED recessed luminaire produces biologically effective light. Thanks to the Tunable White option, it not only has a positive affect on the human biorhythm, health and sleeping quality, but also significantly influences the effectiveness and concentration at work.

- microprismatic optic and opal PMMA diffuser provide optimal, uniform and glare-free light with no visible LED hot spots and excellent light transmission
- flicker-free dimming (20-100 %)
- CRI > 80, CRI > 90, CRI > 95
- UGR < 19 (< 16 on request)
- available sizes: 600x600, 1200x300 mm
- 2700 / 3000 / 4000 / 5000 K
- TW 2700-5000 K (on request)
- emergency 1 or 3 hours
- suitable also for suspended ceilings with grids - no extra cutting needed

113
lm/W



new
ARUN IP with tempered glass.

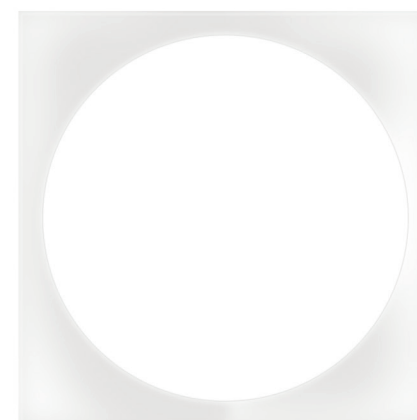

ALVA

A premium lighting environment for sustainable offices

The ALVA LED represents a SMART combination of design and technology achieving the best possible light quality even when illuminating the most demanding lighting areas. Its slim design makes it an ideal solution for tight ceiling conditions and the perfect option to expose the place's architecture.

- fine prismatic PMMA optic for perfect glare reduction and no "rainbow effect" / small symmetrical reflectors
- UGR < 16
- flicker-free dimming (20-100 %)
- CRI > 80, CRI > 90
- 2700 / 3000 / 4000 K
- available sizes: 300x600, 600x600, 625x625, 1200x300 mm
- suitable also for suspended ceilings with grids - no extra cutting needed

120
lm/W




HYPERION

Professional high-bay luminaire, the best choice for industry and sport

The HYPERION LED is a price-performance high-bay luminaire suitable for suspended or ceiling installations. It offers sustainable, high-efficient lighting for industrial plants, warehouses and sport areas.

- high efficiency: 149lm/W
- light output 10600-44000 lm
- material: extruded aluminium profile powder coated matt white RAL 9003
- available in different lumen outputs
- through-wiring (on request)
- power connection on side or on top (on request)
- temperature range from -25 to 50°C







HATOR

Low bay, durable and highly efficient moisture-proof luminaire

The HATOR LED represents a high-quality, excellent energy efficient and maintenance free moisture-proof luminaire. Its robust housing makes it the best choice for many applications, such as: multi-story car parks, industrial plants, warehouses, storage and cold storage rooms, loading bays, corridors, agricultural buildings and other facilities with complex ambient conditions.

- temperature range from -25 to 35°C
- CRI > 80, CRI > 90
- 3000 / 4000 / 5000 K
- gasket: non-aging expanded polyurethane

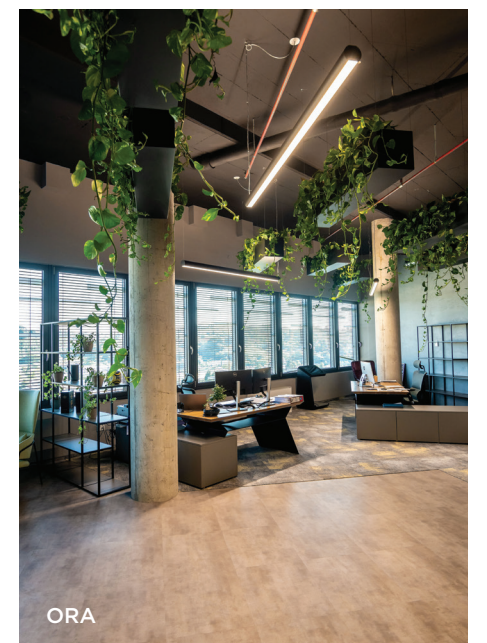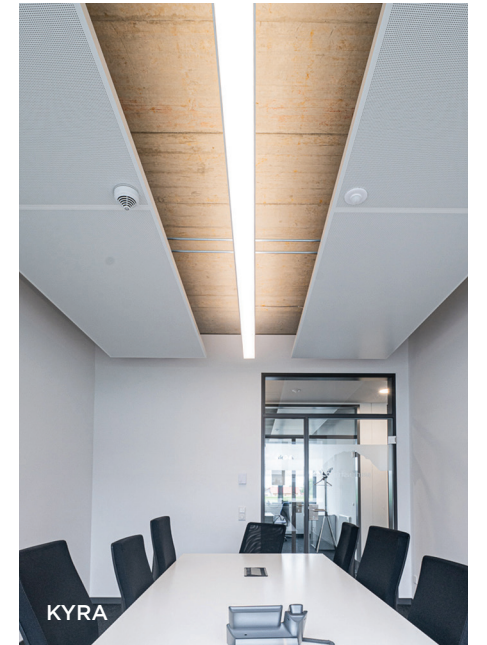

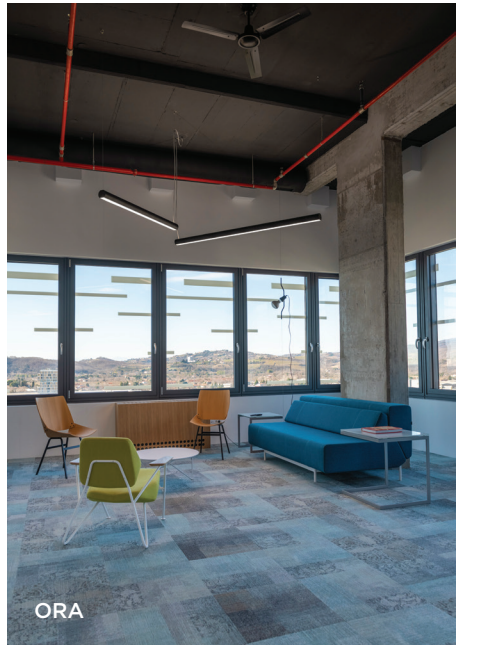



www.ledluks.com

LED Luks d.o.o.

Mednarodni prehod 6, Vrtojba

SI-5290 Šempeter pri Gorici

Slovenia (EU)

info@ledluks.com

